

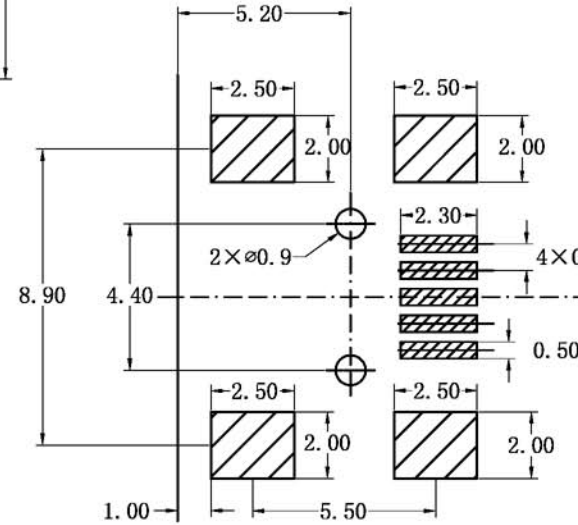
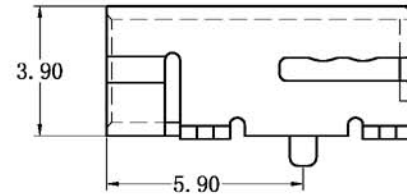
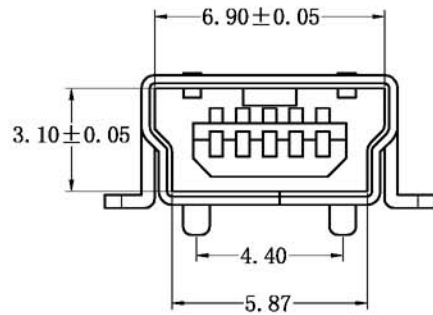


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2011/04/11	/	NEW	Vicky

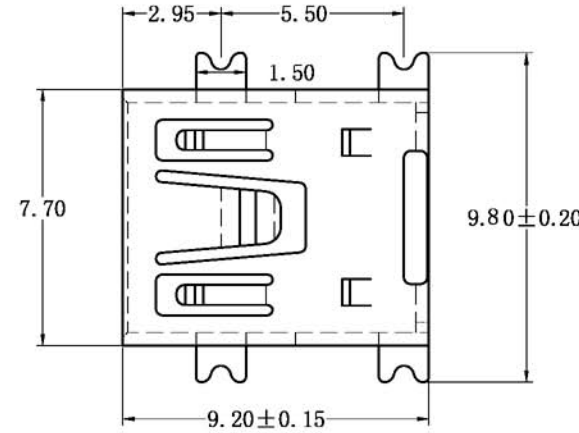

RECOMMENDED PCB LAYOUT

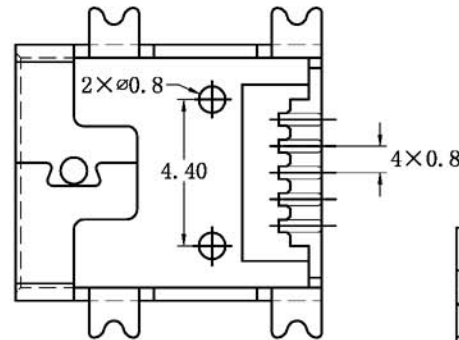

Specifications:

Electrical:

Contact Resistance

50 milliohms MAX

Dielectric Withstanding Voltage:

100 V AC AT Sea Level

Insulation Resistance:

100 MEGA ohms MIN

Material:

Housing: Hing Temperature Thermoplastics,
UL 94V-0


Contact: Copper Alloy

Shell: Copper Alloy

Finish:

Contact: Plated Gold in Mating Area;
Tin On Solder Tails

Shell: Nickel/ Plating

GENERAL TOLERANCE				UNITS mm		NAME: USB		ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.					
SELECT	✓			MAT'L		PART NO: USB105FB-C1017***		TITLE: MINI USB 5P FEMALE B TYPE 外壳两卡点					
TOL ON.	1	2	3										
X.XXX	±0.05	±0.05	±0.15	FINISH		APPD: Vicky		DWG NO. ATOM-A01932					
X.XX	±0.10	±0.13	±0.25										
X.X	±0.20	±0.25	±0.50	Q'TY		CHKD: Emilia							
X.	±0.30	±0.38	±1.00										
ANGLE	±2°												
						DR: Doris		SCALE 1:1		SHEET 1/1		REV A	