

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass



Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

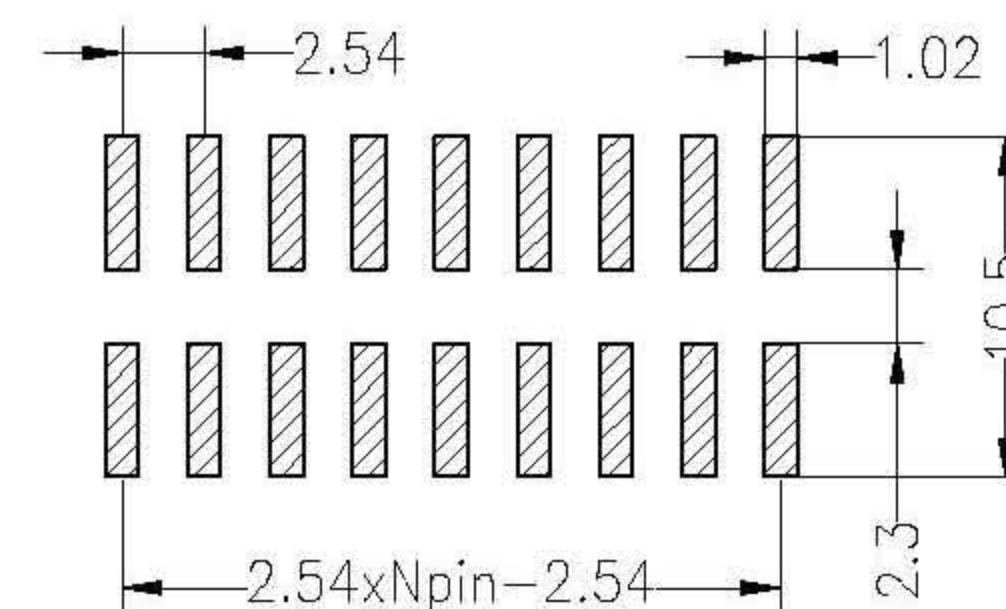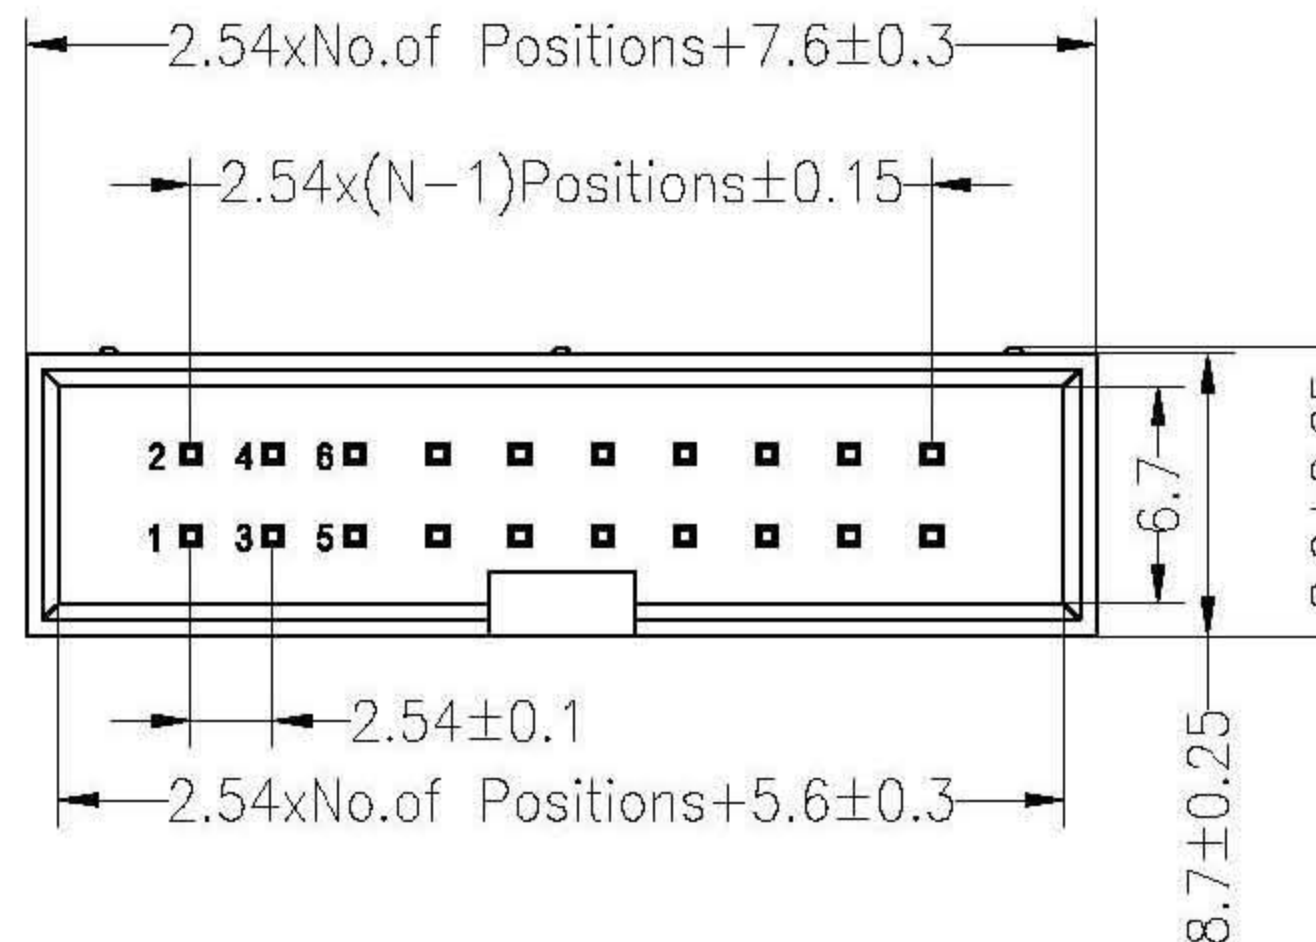

Ordering Information

3210- XX M XX X BK00 02

No.of Pins Per Row	Contact Plating	Insulator Material Option
6--64	G0:Gold Flash	A=BK-PBT
	G1:3U" Gold	B=BK-PA66
	G2:5U" Gold	C=BK-PA6T
	G3:10U" Gold	D=BK-PA46
	G4:15U" Gold	F=BK-LCP
	G5:30U" Gold	
	S0:Gold Flash/Tin	
	SN:Tin	

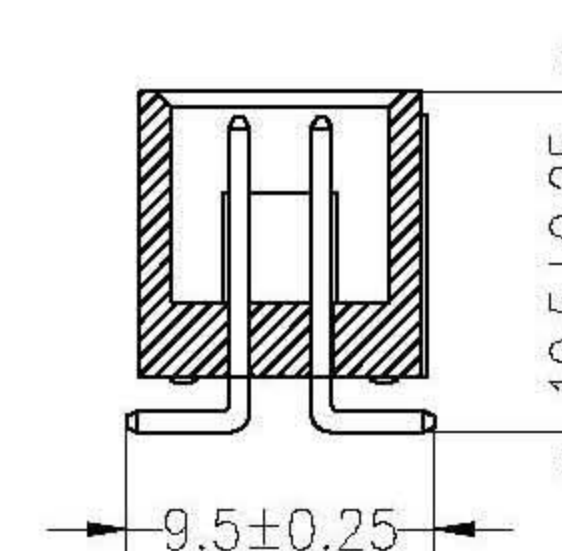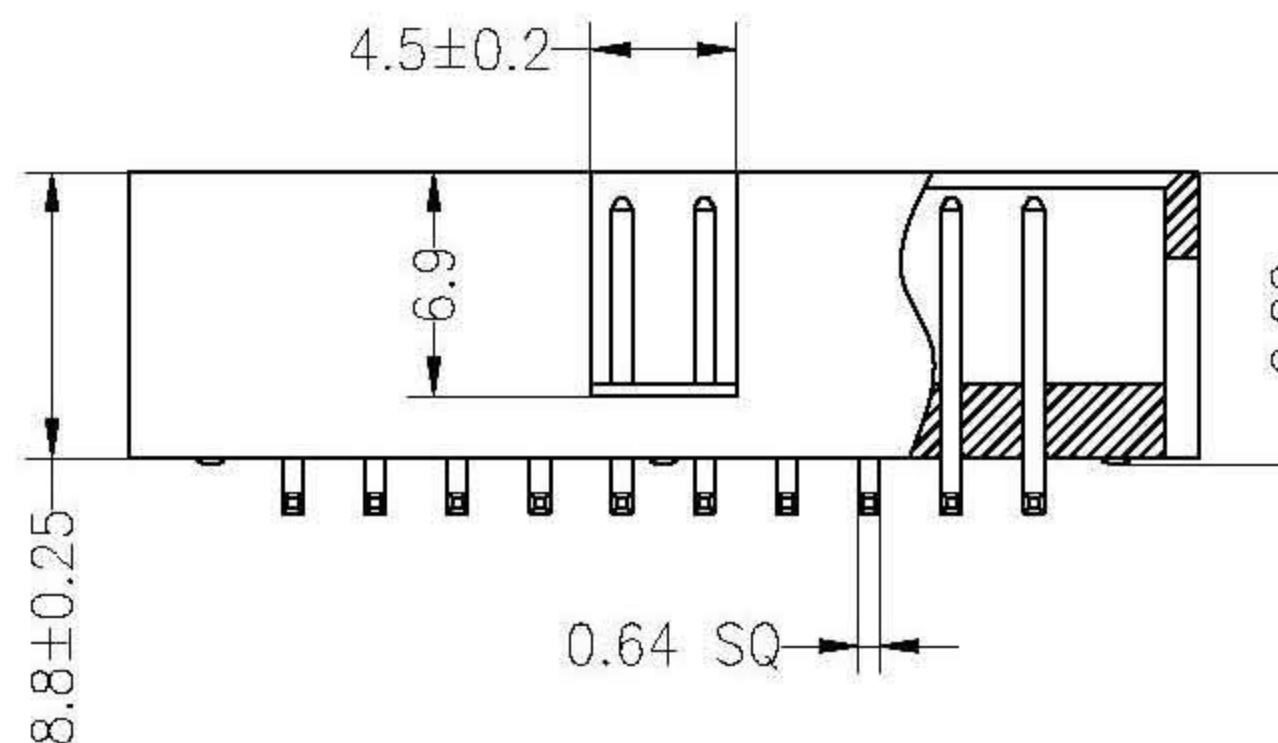

OPERATION

DRAW

YiYuSheng

12.03.28

SCALE

FIT

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

CHECK

APPROVE

UNIT

SIZE

SHEET

PROJ.

mm

A4

1/1

PROJ.

PART NO.

3210-XXMXXXBK0002

TITLE:

2.54mm Box Header H8.8mm SMT

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9