

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance:5000 Mohms Minimum.at DC 500V.
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:




Contact Insertion Force:341 g.Maximum.
 Contact Separation Force:21 g.Minimum.


MATERIALS:

Contacts:Brass.
 Insulator: PBT UL 94V-0 Rated.
 Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.
 Shell:Nickel Plated.

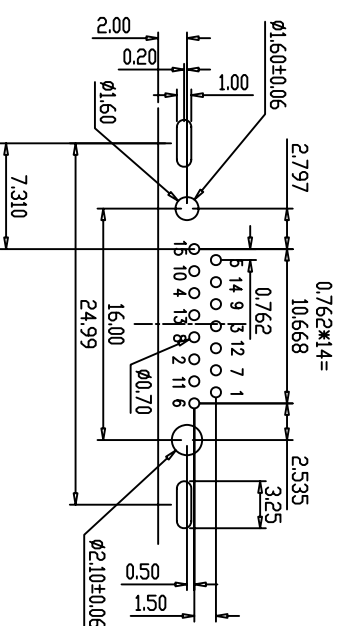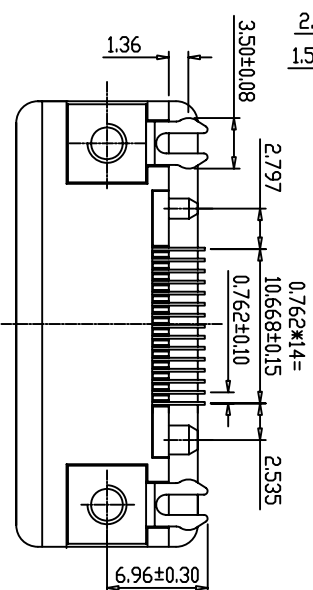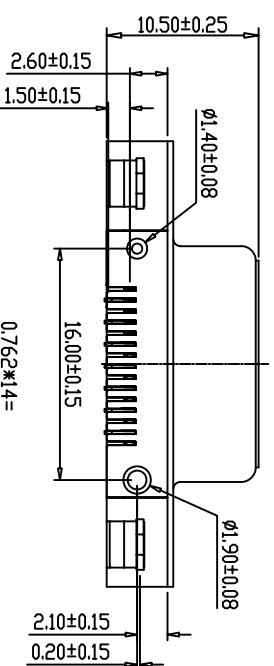

Drawn by	JANKEY	2008.10.05	
Designed by			
Approved by	LINDA	2008.10.05	
Sheet 1 of 1		Code 000	
Dimensions in mm(inches)		Scale 2:1	S11M D-SUB 15 FEMALE HIGH DENSITY CONNECTOR DIP SOLDER
Tolerances on:XX+/-0.05		Angles+/-2°	
Ver A0		1134-015-201-803	