
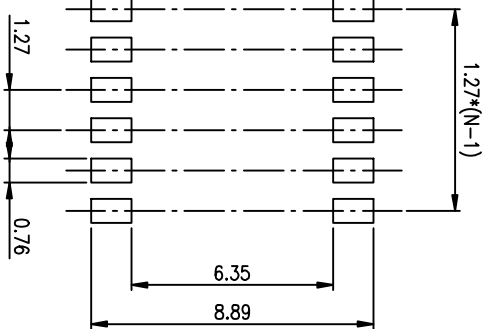
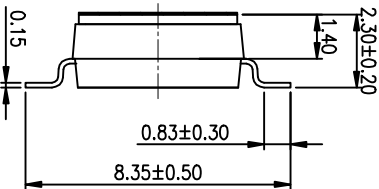




PRODUCT NO.	RoHS compliant
DSHP06TSGER	

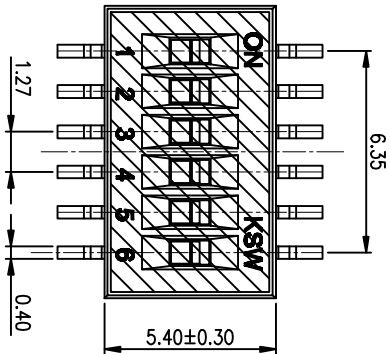

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3μ Gold
④	Terminal	Brass	1μ Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1μ~3μ Gold
⑦	MyIor	UL94 V0	0.05mm

NOTES :1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electrical Life:1000cycles 25mA 24VDC
- 5>.Mechanical Life: 3000cycles Operations


2. PLATING:


GOLD FLASH 1u"~2u" SOLDER TAIL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION :

DSHP XX I S G E R

- 【包装方式: T=管装 R=Reel】
- 【电镀层: B=鍍鍍部1u"~3u" 焊脚部1.2u" G=鍍鍍部30u" 焊脚部30u" F=鍍鍍部10u" 焊脚部10u"
- 【G=鍍全金 S=内鍍金(接触部) 外镀锡(焊脚部)】
- 【脚型: S脚 / J脚 / I脚 / A脚 / Z脚】
- 【T=低推贴胶 S=低推不贴胶 L=长推】
- 【产品规格: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P】



TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	總督精密有限公司 KINGTEK INDUSTRIAL Co.,LTD			
LINER	ANGLES		TITLE			
0 ± 0.25	0. ± 2°		BY DSHP SERIES PITCH 1.27mm			
.00 ± 0.15	.0 ± 1°		PRODUCT FAMILY DSHP SERIES			
.000± 0.10	.00± 0.5°		PRAT NO. DSHP06TSGER			
DESIGN	kathy	03/20/12				
DRAWING		FILE NO. DSHPO6TSGER-A				
CHECK		SIZE UNIT SCALE SHEET REV.				
APPRO.		A4 mm 2 : 1 10F-1 A				