

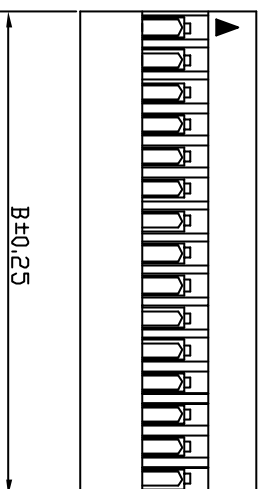


Features:

- * Available in 2X2 through 2X40 Circuits
- * Material: P.B.T+15%GF UL94V-0 or PPO UL94V-0
- * Accepts YY-1800-TF or YY-1900-T or YY-1800-TM Crimp Terminal
- * Mates with YY-1900-WXXS or YY-1900-WXXR Series Header

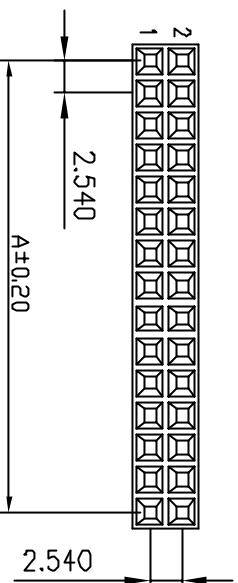

Ordering information:

YY-1900-HXX-X-XX
1 2 3 4 5

1 H=Housing

2 No. of Circuits 04~80

3 □:No Taphole

FXP:Tuck XXPin

4 Color:

□:Black B:Brown G:Blue
D:Orange C:Red H:Purple
E:Yellow J:White I:Gray
F:Green K:Pink

Circuits	Dimension mm	
	A	B
2X2	2.54	5.08
A: 2.54 X (PART NO. OF PIN/2-1)		
B: 2.54 + A		
2X40	99.06	101.60

EDITION	DATE	MODIFY	DRAW BY	WangJM	VIEW:	TOLERANCE	2.54mm (.100") Pitch Housing
A0	2006.04.21	DRAWING	AUDITING	GUAN		.0 ±0.20 ±0.15 ±0.05	PART NO: YY-1900-HXX-X-XX
			APPROVAL	SUNNY	UNIT: mm	.000	DWG NO: A2546H014
							REV. A0



毅耀實業股份有限公司
東莞加成五金塑膠電子廠
YOUNG YAK ENTERPRISE CO.,LTD.