


D-Sub Connector I.D.C. Type For Flat Cable



SPECIFICATIONS

Materials



Insulators: Polyester Resin and Glass Fiber Reinforced(UL94V-0)
 Contacts: Phosphor Bronze.
 Shell: Steel, Tin Plated
 Contact Finish: Gold Over Nickel.
 I.D.C. Terminal Finish: Gold Over Nickel.

Electrical



Insulation Resistance: 1000 Megohms Minimum.
 Insertion Force: 12 oz MAX.
 Contact Current Rating: 1A
 Contact Resistance: 10m Ω Max
 Contact Retention: 10lb(44N) Minimum.
 Operating Temperature: -55°C ~ 105°C
 Dielectric Voltage: 500 VAC for one minute
 Connector Retention: 10lb(44N) Min (Insulator Push Out of Shell)
 Extraction Force: 0.75 oz MIN.
 Wire Size: AWG 26 or 28 Stranded,
 1.27mm Conductor Center Flat Cable.

POSITION	A	B	C
9P	16.92	25.00	30.8
15P	25.25	33.30	39.2
25P	38.96	47.10	53.1
37P	55.42	63.50	69.4
50P	52.81	61.00	67.0

POSITION	A	B	C
9S	16.30	25.00	30.8
15S	24.60	33.30	39.2
25S	38.30	47.10	53.1
37S	54.80	63.50	69.4
50S	52.20	61.00	67.0

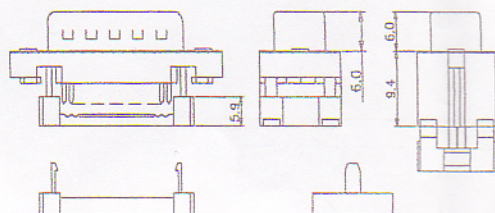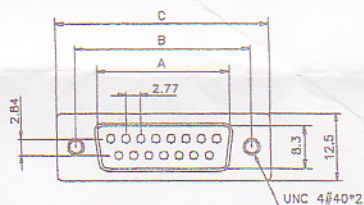

MALE

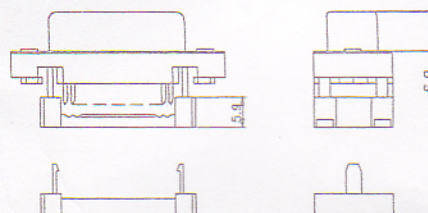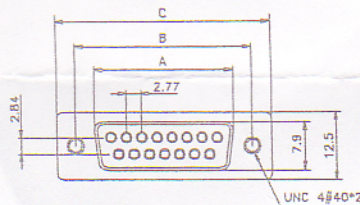

FEMALE

ORDER INFORMATION

D	F1	-	09	P	M	B	G
1	2		3	4	5	6	7

1.SERIES NO.
D-Sub

3.NO. OF CONTACTS
09 15 25 37 50

5.SHELL OPTION
M: Metal Shell
P: All Plastic

7.CONTACT PLATING
S: Selective Gold
G: Gold Flash
B: 10 μ " Gold
C: 15 μ " Gold
D: 30 μ " Gold

2.TERMINAL VERSION
F1: IDC Type

4.CONNECTOR TYPE
P: Male
S: Female

6.INSULATOR COLOR
B: Blue
G: Grey
N: Black