



Φ12.0 x8.5(h)mm

## BTA-16

ORDERING CODE: B T A - 16

① ② ③

① Magnetic Buzzer

② Series Number


③ Coil Resistance

NO	SPECIFICATION	DATA
1	Rated Voltage (V)	1.5
2	Operating Voltage (V)	1~2
3	Coil Resistance (Ω)	16±3
4	Resonant Frequency (Hz)	2048
5	*Sound Output at 10cm (dB)	Min 90
6	*Current Consumption (mA)	Max 50
7	Operating Temperature (°C)	-20 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	1.3g
10	RoHS	YES
11	Packing Quantity	100pcs/box

\*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

### DIENSIONS (unit : mm)

Tolerance: ±0.5mm Except Specified

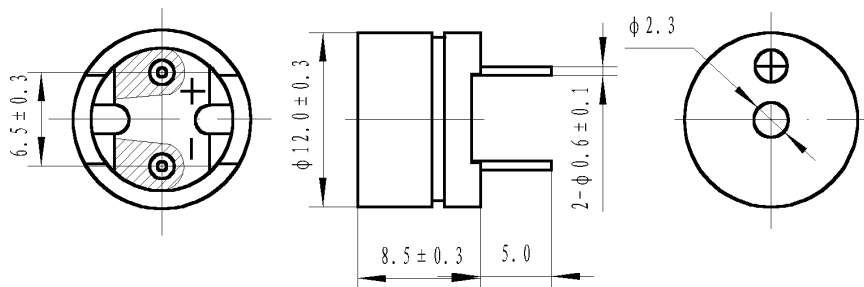



Φ12.0 x8.5(h) mm

## BTA-50

ORDERING CODE: **B T A - 50**

① ② ③

① Magnetic Buzzer

② Series Number

③ Coil Resistance

NO	SPECIFICATION	DATA
1	Rated Voltage (V)	1.5
2	Operating Voltage (V)	1~2
3	Coil Resistance (Ω)	50±5
4	Resonant Frequency (Hz)	2048
5	*Sound Output at 10cm (dB)	Min 90
6	*Current Consumption (mA)	Max 40
7	Operating Temperature (°C)	-20 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	1.3g
10	RoHS	YES
11	Packing Quantity	100pcs/box

\*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

### DIENSIONS (unit : mm)

Tolerance: ±0.5mm Except Specified

